


ANNOUNCED SPECIFICATION OF HS-325HB STANDARD BALL BEARING SERVO

1. TECHNICAL VALUE

CONTROL SYSTEM	:+PULSE WIDTH CONTROL 1500usec NEUTRAL	
OPERATING VOLTAGE RANGE	:4.8V TO 6.0V	
TEST VOLTAGE	:AT 4.8V	AT 6.0V
OPERATING SPEED	:0.19sec/60°MT NO LOAD	0.15sec/60°MT NO LOAD
STALL TORQUE	:3kg.cm(41.66oz.in)	3.7kg.cm(51.38oz.in)
IDLE CURRENT	:7.4mA AT STOPPED	7.7mA AT STOPPED
RUNNING CURRENT	:160mA/60°MT NO LOAD	180mA/60°MT NO LOAD
STALL CURRENT	:700mA	800mA
DEAD BAND WIDTH	:5usec	5usec
OPERATING TRAVEL	:40°NONE SIDE PULSE TRAVELING 400usec	
DIRECTION	:CLOCK WISE/PULSE TRAVELING 1500 TO 1900usec	
MOTOR TYPE	:CORED METAL BRUSH	
POTENTIOMETER TYPE	:4 SLIDER/DIRECT DRIVE	
AMPLIFIER TYPE	:ANALOG CONTROLLER & TRANSISTOR DRIVER	
DIMENSIONS	:40x20x36.5mm(1.57x0.78x1.43in)	
WEIGHT	:43g(1.51oz)	
BALL BEARING	:TOP/BALL BEARING	
GEAR MATERIAL	:2 HEAVY DUTY RESIN	
HORN GEAR SPLINE	:24 SEGMENTS/Ø176	
SPLINED HORNS	:RESULAR/R-C,R-D,R-I,R-O,R-X,SUPER/R-XA	
CONNECTOR WIRE LENGTH	:300mm(11.81in)	
CONNECTOR WIRE STRAND COUNTER	:40EA	
CONNECTOR WIRE GAUGE	:25AWG	

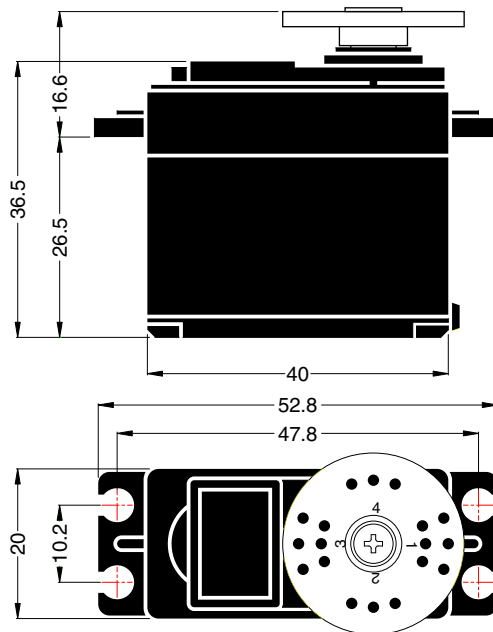

2. FEATURES

LONG LIFE POTENTIOMETER, TOP BALL BEARING, 2 HEAVY DUTY RESIN GEARS

3. APPLICATIONS

AIRCRAFT 20-40 SIZE, STEERING AND THROTTLE SERVO FOR CARS, TRUCK AND BOATS

4. ACCESSORY & OPTION

CASE SET/	GEAR SET/	BALL BEARING SET/	HORN SET/
HS322T:1EA	HS322G1:1EA	MR106x1EA	R-C:1EA
HS322M:1EA	HS325G2:1EA		R-D:1EA
HS322L:1EA	HS325G3:1EA		R-I:1EA
PH/T-2 2x30 NI:4EA	HS322G4:1EA		R-O:1EA
	HS300RB:1EA		R-X:1EA
			R-XA:1EA
			WH/W 2.1x15 NI:4EA
			BST 3x5.5:4EA
			NBR 9x6.5x6:4EA